

07-13-00

07/12/00

Jc862 U.S. PTO

Jc490 U.S. PTO

09/614784

07/12/00

A

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new non-provisional applications under 37CFR§1.53(b))

Attorney Docket
No.

TAL 7146.075

First Inventor or Application
Identifier

K. Srinivas

Title

METHOD OF HYBRID SOFT/HARD DECISION
DEMODULATION OF SIGNALS WITH MULTILEVEL
MODULATION

Express Mail Label No.

EL471812502US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Commissioner for Patents
Box Patent Application
Washington, D.C. 20231

1. ☒ *Fee Transmittal Form (e.g. PTO/SB/17)
(Submit an original and a duplicate for fee processing)

5. ☐ Microfiche Computer Program (Appendix)

2. ☒ Specification

Total pages

21

6. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)

(preferred arrangement set forth below)

- Descriptive Title of the Invention
- Cross References to Related Applications
- Statement Regarding Federally Sponsored Research
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure

- a. ☐ Computer readable copy

- b. ☐ Paper copy (identical to computer copy)

- c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

3. ☒ Drawing(s) (35 USC 113)

[Total Pages

3

7. ☒ Assignment Papers (cover sheet & document(s))

8. ☒ 37 CFR §3.73(b) Statement ☒ Power of Attorney
when there is an assignee

9. ☐ English translation document (if applicable)

10. ☐ Information Disclosure Statement (IDS) /PTO
1449 ☐ Copies of IDS Citations

4. Oath or Declaration

[Total Pages

4

11. ☐ Preliminary Amendment

- a. ☒ Newly executed (original or copy)

- b. ☐ Copy from a prior application (37 CFR §1.63(d))
(for continuation/divisional with Box 16 completed)

12. ☒ Return Receipt Postcard (MPEP 503)
(should be specifically itemized)

- i. ☐ Deletion of Inventor(s)

Signed statement attached deleting inventor(s)
named in the prior application,
see 37 CFR §§1.53(d)(2) and 1.33(b)

13. ☐ *Small Entity Statements (PTO/sb/09-12) ☐ Statement filed in prior
application. Status still proper and desired.

14. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)

15. ☐ Other

Note for Items 1 & 13: In order to be entitled to pay small
entity fees, a small entity statement is required (37 CFR §1.27),
except if one filed in a prior application is relied upon (37 CFR
§1.28)

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: ____/____

Prior application information: Examiner

Group No./Art Unit

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under
Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference.
The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

(Insert customer number or attach bar code label here)

or ☒ Correspondence address below

Name Timothy A Long

Address 601 SW Second Ave., Suite 1600

City Portland

State OR

Zip Code 97204-3157

Country US

Telephone (503)227-5631

FAX (503)228-4373

Name (print type) Timothy A. Long

Registration No.

28,876

Signature

Timothy A. Long

Date

July 12, 2000

METHOD OF HYBRID SOFT/HARD DECISION DEMODULATION OF SIGNALS WITH MULTILEVEL MODULATION

5

BACKGROUND OF THE INVENTION

The present invention relates to demodulation of multilevel signals and, more particularly, to methods of demodulating multilevel signals to obtain a binary value for a signal that includes bits produced by hard and soft decisions.

10 The goal of a digital communication system is to deliver information represented by a sequence of binary symbols through a physical communication channel to a receiver. The symbols are mapped by a digital modulation process into signals selected to match the characteristics of the communication channel. Multilevel digital modulation processes are often used in applications requiring a
15 high bit rate in a channel of limited bandwidth. Multilevel modulation maps symbols into a plurality of waveforms so that any time the transmitted signal represents a plurality of symbols. Phase-shift keying is a linear modulation method used in multilevel digital modulation. Two equal sinusoidal components (in-phase (I) and quadrature (Q)) at the same frequency, but 90° apart in phase,
20 are added to produce a single wave at the same frequency with four unique phases (90° apart) corresponding to the I and Q components of the signal. Each of the sinusoidal components can represent either a digital "1" or a digital "0" as designated by a 180° phase shift. Phase-shift keying may also be combined with pulse amplitude modulation (PAM) in a modulation technique known as
25 quadrature amplitude modulation or QAM in which each of the phases has an amplitude that is the vector sum of the amplitudes of the in-phase and quadrature components. A two-bit quantization of both the in-phase and quadrature components results in 16 unique states of the carrier of each modulated symbol permitting transmission of four bits per symbol. The resulting combinations of
30 in-phase and quadrature components are referred to as a signal constellation and

the number of signals in the constellation indicates the order of the digital modulation. For example, 16-QAM indicates a constellation of 16 signal vectors with each of the I and Q components represented by two bits and 64-QAM indicates a three-bit quantization of both I and Q to produce 64 unique signal levels or a 64 signal vector constellation.

A second important aspect of a digital communication system is the detection and correction of bit errors that result from the transfer of the information in an imperfect medium. In some systems, errors are detected and corrected by retransmission of the information. In other systems, retransmission is not acceptable and error detection is combined with error correction using forward error correction (FEC) coding techniques. With FEC additional symbols are systematically inserted into the data stream to add redundancy to the transmission. In addition, adjacent individual bits of the transmitted message may be dispersed in the data stream by interleaving. Interleaving reduces susceptibility to burst errors that can corrupt sequential bits in the stream. FEC coding commonly employs block coding, convolutional coding, or turbo-coding which interleaves the data stream between a plurality of encoders.

At the receiver, the acquired signals are demodulated and decoded. The FEC decoder applies an algorithm to the demodulated signal to determine the most likely symbols of the original message even though the acquired signal may include data errors. The Viterbi algorithm is a commonly used and efficient algorithm for decoding convolutional coded or turbo-coded bitstreams. The convolutional coding and turbo-coding processes can be represented by a trellis diagram where each node of the diagram represents a coding interval. The decoder attempts to retrace the path through the trellis take by the encoder in encoding the original data. The Viterbi algorithm relies on calculation of a path metric or measure of the likelihood for all paths through the trellis that could have been taken at each coding interval. The decoder then discards all but the most likely path and initiates decoding of the next interval. The path metrics can be computed using binary or hard decision information related to the modulation

symbol. Alternatively, the bits of the modulation symbol obtained from the demodulator may be mapped into values reflecting an estimate of the received symbol and an indication of the reliability of this estimate or soft decision information. For example, if a signal employs three-bit quantization, two of the bits
5 might be used as a reliability measure. It is well known that FEC decoders such as the Viterbi decoder make better decisions if information about the quality of the acquired signal (soft information) is available during decoding.

Hong et al., U.S. Patent No. 5,134,635, describe a soft-decision Viterbi decoder that uses channel state information to decode convolutionally encoded
10 information transmitted with a 16-QAM multilevel signal. Bit metrics are produced for each of the four bits of the demodulated acquired signal. The two bits of the bit metric reflect a level of reliability or likelihood that the corresponding bit of the demodulated signal is either a binary "1" or binary "0". The lower the value of the specific bit metric the higher the likelihood that the corresponding bit is correctly
15 represented by the value specified for the bit. The Viterbi decoder makes the final determination of the value of each binary digit of the data stream from the sequence of demodulated signal values and the corresponding bit metrics. However, the method is limited to extraction of soft decision information from a 16-QAM multilevel signal. The method is not generalized for use with higher order
20 QAM signal constellations or with PSK modulated signals.

Le Goff et al., in a paper entitled TURBO-CODES AND HIGH SPECTRAL EFFICIENCY MODULATION, Proc. of International Communications Conference, pp. 645-649, IEEE, 1994, disclose a coding scheme combining turbo-codes and multilevel signal modulation. A method of approximating bit metrics or log
25 likelihood ratios (LLRs) for the constituent bits of a QAM or PSK symbol is described. This method provides a generalized method of extracting soft decision information from the modulated signal that produces the results of Hong et al. when applied to 16-QAM signals. The method yields soft information for each of the bits of the demodulated signal. While the availability of information based on
30 soft decisions is beneficial to the decoding process, soft information increases the

quantity of data that must be processed during decoding which increases the cost and complexity of the decoder. In some applications, the additional cost and complexity of the decoder may not be justified. Satisfactory decoding may be accomplished with bits obtained by a mixture of hard and soft decisions

- 5 concerning the multilevel signal. The method of LeGoff et al. does not provide for a demodulated signal that is represented by a mixture of bits based on hard and soft decisions.

What is desired, therefore, is a method of demodulating a multilevel, acquired signal to produce a binary representation of the signal comprising bits
10 resulting from both hard and soft decisions concerning the value of the acquired signal.

SUMMARY OF THE INVENTION

The present invention overcomes the aforementioned drawbacks of the
15 prior art by providing a method of demodulating a multilevel signal comprising the steps of assigning a value to a bit representing the demodulated signal; identifying at least one signal constellation vector proximate to the multilevel signal; and determining a reliability measure for the bit of the demodulated signal if the bit occupies a bit position corresponding to a bit position of the proximate
20 constellation vectors occupied by a bit of varying value. A set of at least one vector of a signal constellation proximate to the multilevel signal is identified. If a bit occupying a bit position in the set of proximate vectors is constant, a hard decision is made and a value assigned to the corresponding bit of the demodulated signal. On the other hand, if the bit occupying a bit position in set of
25 the proximate vectors varies, a value and a measure of the reliability of that value or a soft value are assigned to the corresponding bit of the demodulated signal. The resulting demodulated signal is a mixture of "hard" and "soft" bits if the acquired signal has at least one phase component with a value within the limits of the signal constellation.

30 The present invention also discloses a method of demodulating a multilevel

signal comprising comparing a reliability of at least two bits of a demodulated multilevel signal; assigning a hard decision value to a bit associated with a greater reliability; and assigning a soft decision value to a bit associated with a lesser reliability. In addition, the number of bits of the demodulated multilevel signal
5 having hard values and soft values can also be predetermined by setting a range for the measure of reliability having limits equaling the desired number of bits to be produced by soft decisions.

The foregoing and other objectives, features and advantages of the invention will be more readily understood upon consideration of the following
10 detailed description of the invention, taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram of a wireless communication system.
15 FIG. 2 is an illustration of a signal constellation for a 16-QAM multilevel signal including a plurality of acquired multilevel signals.
FIG. 3 illustrates bit mapping of an eight level pulse amplitude modulated (8-PAM) symbol.
FIG. 4 is a graph of values of the log likelihood ratios for three bits of an
20 8-PAM symbol.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

A block diagram of an exemplary digital wireless local area network (WLAN) communication system 10 is illustrated in FIG. 1. A message 12
25 originating at a source 14 is input to an FEC encoder 16 where additional bits are inserted into the data stream for forward error correction (FEC). Convolutional codes, block codes, and turbo-codes are common coding methods for FEC. In addition to coding, interleaving may be incorporated in the FEC technique to disperse adjacent bits of the data stream in the transmitted data stream. The
30 encoded data is converted to a multilevel modulated signal in a multilevel signal

modulator 18. Multilevel modulation schemes include phase key shifting (PSK) modulation and quadrature amplitude modulation (QAM). The result is a signal having analog real and imaginary phase components.

In the communication system 10, the multilevel modulated signals are further modulated in an Orthogonal Frequency Division Multiplexing (OFDM) modulator 20. Obstructions in the transmission area can result in the transmitted signal traveling over multiple paths in the communication channel 22. Multiple versions of the signal can interfere with each other making it difficult to extract the original message. OFDM applies an inverse discrete Fourier transform to the signal before transmission to reduce the effects of multiple paths in the communication channel 22. The embodiment of the communication system 10, including an OFDM modulator, is provided for purposes of illustration only. The present invention may be exploited in communication systems that include other multilevel modulation methods.

At the receiver 24 (indicated by a bracket) an inverse fast Fourier transform is applied to the received signal in an OFDM demodulator 26 to produce the acquired version of the multilevel signals. The binary representations of all possible demodulated signals for a digital modulation technique are represented by a constellation of signal vectors. Referring to FIG. 2, a signal constellation 50 for a 16-QAM multilevel signal includes 16 signal vectors 52 arrayed along quadrature (Q) 54 and in-phase (I) 56 axes. Each signal vector 52 of the 16-QAM signal constellation 50 is represented by four bits with two bits representing the level of the Q component and two bits representing the level of the I component. As illustrated in FIG. 3, a signal constellation can be arranged in a Gray code arrangement where only one bit differs between adjacent signal vectors 52. Similarly, a signal constellation for 64-QAM modulation would include 64 signal vectors with the Q and I components each represented by three bits. Acquired multilevel signals from the OFDM demodulator 26 are defined by the values of their analog quadrature (Q) 54 and in-phase (I) 56 components. In the multilevel signal demodulator 30 a hybrid soft-hard decision demodulation method is applied

to the multilevel signal to produce a binary representation of the acquired signal including soft decision information expressing the level of reliability concerning the correctness of certain bits of the digitized demodulated signal. The digital representation of the demodulated acquired signal is forwarded by the multilevel
5 signal demodulator 30 to a decoder 32 that decodes the signal to produce the error corrected decoded message 34 to be consumed by the information sink 36. A Viterbi decoder is often used to decode the convolutional codes or turbo-codes common in wireless communication systems. However, sequential decoders, MAP algorithm decoders, or other decoders may be used for decoding these
10 codes. Other types of appropriate decoders would be used with other types of FEC coding.

In addition to the 16 possible signals represented by signal vectors of the signal constellation 50, three exemplary acquired signals 58, 60, and 62 are illustrated in FIG. 2. The acquired signals are located relative to the constellation
15 by the values of their in-phase and quadrature signal components which are obtained from the outputs of quadrature and in-phase demodulators in the multilevel signal demodulator 30. A first exemplary signal 58 has quadrature and in-phase components within the limits of the Q and I values of the signal vectors of the constellation 50. A second exemplary acquired signal 60 is located outside of
20 the constellation 50, but has a quadrature component with a value within the limits of the quadrature values of the vectors of the constellation 50. Likewise, an acquired signal could be located outside of the constellation but have an in-phase component within the limits of the constellation 50. A third exemplary acquired signal 62 is located outside of the constellation 50 and in a region 64 where both
25 its in-phase and quadrature components exceed the limits of the corresponding components of the constellation 50.

In a first hybrid soft-hard demodulation method of the present invention, bit signals or bits of the binary representation of the demodulated acquired signal are assigned on the basis of a relationship of the acquired signal and proximate
30 vectors of the appropriate signal constellation. A nearest neighborhood of the

constellation 50 is defined for an acquired signal. If the acquired signal has quadrature and in-phase components within the limits of Q and I components for the constellation, the neighborhood is defined by four proximate vectors of the constellation. For the exemplary acquired signal 58, the associated

5 neighborhood 66 is defined by the four proximate vectors 68, 70, 72, and 74. On the other hand, if one of the components of the acquired signal has a value exceeding a limit of the constellation, the neighborhood is defined by two proximate vectors of the constellation. For example, the acquired signal 60 has an in-phase component with an absolute value exceeding the absolute value of
10 the limit of the in-phase component of the constellation 50 and the neighborhood is defined by the line 76 connecting the two nearest vectors 78 and 80 of the constellation 50. The acquired signal 62 illustrates a third case where both phase components of the acquired signal have values exceeding the limits of the constellation 50. If the absolute value of both phase components of the acquired
15 signal exceed the absolute value of the limits of the components in the constellation, the neighborhood is defined by a single proximate vector. In the case of the acquired signal 62 the neighborhood is defined by the vector 82. In general, the vectors of the constellation 50 defining the neighborhood associated with an acquired signal comprise a signal vector having both in-phase and
20 quadrature phase components of a maximized absolute value for constellation vectors that does not exceed the absolute value of the in-phase and quadrature components of the acquired signal; any constellation vector having one phase component with a maximized absolute value that does not exceed the corresponding phase component the acquired signal and a second phase
25 component having minimized absolute value for constellation vectors which is not less than the corresponding phase component of the acquired signal, and any vector of the constellation for which phase components have minimized absolute values which are not less than values of the corresponding phase components of the acquired signal.

30 Once the neighborhood has been identified, the signal vectors defining the

neighborhood are examined to determine which bits remain constant and which bits vary for the set of proximate vectors. For example, for the neighborhood 66 the bit signals occupying the first (most significant bit) and third bit positions are constant while the second and fourth (least significant bit) bits vary for the

5 neighborhood defining vectors or proximate vectors 68,70,72, and 74. Since the constellation 50 has a Gray code arrangement, neighboring vectors vary by a single bit. As a result, only the second bit varies for the two vectors 78 and 80 defining the neighborhood 76 related to acquired signal 60. Since the neighborhood related to acquired signal 62 is defined by a single vector 82 all bits

10 are constant for the set of neighborhood defining vectors.

Bits that vary or remain constant can be identified and stored for each set of neighborhood defining or proximate vectors in the signal constellation. On the other hand, logic circuitry can be used to identify the bits of neighborhood defining vectors that vary. Two $n/2$ -tuple vectors, b_I and b_Q , can be defined as the Gray

15 code, binary equivalents of the signal components X_f and Y_f , which are equal to the largest valued (maximized) in-phase (I) and quadrature (Q) components, respectively, of the constellation that are less than the corresponding I and Q components of an acquired signal. In addition, $b_j(i)$ with $j = I$ or Q is defined to represent the i^{th} element. For a 16-QAM signal constellation, the bit signals that

20 vary in the set of neighborhood defining vectors are identified when the following Boolean expressions corresponding to the first (most significant bit) and second bit signals respectively, are "true":

$$b'_j(0) \bullet b_j(1), \text{ and}$$

$$b'_j(0) \bullet b'_j(1) + b_j(0) \bullet b_j(1)$$

25 where b'_j is the complement of b_j , " \bullet " is the logical "AND" operator and "+" is the logical "OR" operator.

For 64-QAM, the varying bits can be identified from the expressions

$$b'_j(0) \cdot b_j(1) \cdot b'_j(2),$$

$$b'_j(0) \cdot b'_j(1) \cdot b'_j(2) + b_j(0) \cdot b_j(1) \cdot b_j(2), \text{ and}$$

$$\text{XNOR } b_j(0), b_j(1), b_j(2)$$

- 5 corresponding respectively to the first (most significant bit), second and third bits of the signal vector.

If the value of a bit occupying a bit position does not vary for a set of neighborhood defining vectors related to an acquired signal, that value is assigned to the bit occupying the corresponding bit position of the acquired signal. In addition, if the value of the bit is binary "0" a soft value of "-1" is assigned to the second bit of the pair specifying the component and if the value of the bit is "1" a soft value of "+1" is assigned to the corresponding bit. As a result, hard decision values are assigned to bits of the acquired signal corresponding to bits occupying positions in the neighborhood defining vectors with values that do not vary for the set of vectors.

On the other hand, if the value in a bit position of the neighborhood defining vectors varies for the vectors of the set, a soft decision value or reliability measure is assigned to the corresponding bit of the acquired signal. The reliability measure is a function of the relative positions of the acquired signal and the center of gravity of the associated neighborhood. The center of gravity of a neighborhood is a point equidistant from the applicable neighborhood defining vectors. For example, for the neighborhood 66 the center of gravity 84 is located equidistant from the four neighborhood defining vectors 68, 70, 72, and 74. Likewise, the center of gravity 86 of the neighborhood 76 is located at the midpoint of the line connecting the neighborhood defining vectors 78 and 80.

The values of the phases or phase coordinates of each of the centers of gravity of the possible neighborhoods of a signal constellation can be predetermined and stored. Alternatively, the center of gravity of a neighborhood can be computed from the components of the acquired signal. For example, the

total number of bits describing a point for a q-ary QAM signal constellation is given by:

$$n = \log_2 z$$

where: n = the number of bits

5 z = the number of levels of modulation

If the acquired signal, as expressed by its components, is vector (x,y) the neighborhood defining vectors of a signal constellation can be determined from a floor function where $x_f = \lfloor x \rfloor$ and $y_f = \lfloor y \rfloor$ and $\lfloor x \rfloor$ and $\lfloor y \rfloor$ are defined as the maximum value of the in-phase or quadrature component of a vector of the signal constellation that is less than the corresponding value of the component of the acquired signal. For example, for the 16-QAM constellation 50 $x_f = 1$ if the acquired signal component (x) equals 2.5. If the acquired signal is outside of the constellation, the floor function is adjusted to produce component values locating the center of gravity of the neighborhood to a point within the constellation. If 15 $x_f > 2^{n/2} - 1$, x_f is set to $x_f = 2^{n/2} - 1$; or if $x_f < -(2^{n/2} - 1)$, x_f is set to $x_f = -(2^{n/2} - 1)$ to adjust the coordinate of the center of gravity to the boundary of the constellation. Likewise, if $y_f > 2^{n/2} - 1$, y_f is set to $y_f = 2^{n/2} - 1$; or if $y_f < -(2^{n/2} - 1)$, y_f is set to $y_f = -(2^{n/2} - 1)$ to adjust the y coordinate of the center of gravity to the outer limit of the constellation 50. For acquired signals, such as signal 58, having coordinates 20 within the constellation, the coordinates of the center of gravity of the nearest neighborhood are:

$$C_I = x_f + 1$$

$$C_Q = y_f + 1$$

where: C_I = the in-phase coordinate of the center of gravity

25 C_Q = the quadrature coordinate of the center of gravity

If a signal, such as acquired signal 60, has one coordinate located beyond the limits of the constellation then only the one computed coordinate of the center of gravity would be required. In the case of an acquired signal, such as signal 62, having both coordinates outside the limits of the constellation, it is not necessary

to locate the center of gravity because hard values are assigned to all bit signals.

Soft values are provided for bits of an acquired signal that occupy bit positions corresponding to the bits of the set of neighborhood defining vectors having varying values. The soft values express a relationship between the relative positions of the acquired signal and the nearest vectors of the signal constellation which is a measure of the reliability of the demodulator's estimation of the value of the bit in the demodulated signal. A measure of reliability can be expressed as the distance between the in-phase and quadrature coordinates of the acquired signal and the in-phase and quadrature coordinates the center of gravity of the associated neighborhood of the signal constellation:

$x - c_I$ (for the in-phase component bit);

$y - c_Q$ (for the quadrature component bit);

where: x = the acquired in-phase signal component

y = the acquired quadrature signal component

c_I = the in-phase coordinate of the neighborhood center of gravity

c_Q = the quadrature coordinate of the neighborhood center of gravity

Using the first hybrid demodulation method of the present invention, hard values are assigned to bits of the demodulated signal occupying bit positions corresponding to bits of the nearest vectors of the signal constellation which have a constant value. If a bit representing the nearest vectors of the signal constellation varies, expressing uncertainty concerning the correct value of the acquired signal component, a measure of reliability or soft information is also provided with the value of the demodulated signal to improve the performance of the decoder.

Some of the bits of an acquired signal are more likely to be correct than others. The second hybrid demodulation method of the present invention takes advantage of the relative reliability of the demodulated bits, to provide hard

decision values for a predetermined number of the "more reliable" bits of the acquired signal and soft values for the remaining "less reliable" bits. The relative reliability of the bits of the acquired signal is determined by comparing a log likelihood ratio (LLR) for each of the bits.

- 5 For example, a 64-QAM multilevel signal comprises an eight level pulse amplitude modulated (PAM) signal for each of the Q and I components. The signal constellation can be separated and each of the PAM signals can be considered separately. The binary representation of the signal constellation for an eight-level, Gray coded PAM signal 100 of the in-phase (X) component of a
- 10 64-QAM signal constellation is illustrated in FIG. 3. The quadrature component of the QAM signal would be represented by an identical PAM signal constellation. Each level of the PAM signal is described by a three bit binary number comprising bit signals u_1 , u_2 , and u_3 102. Likewise, lesser or higher orders of QAM having square signal constellations are produced by a pair PAM signals which can be
- 15 represented by an appropriate number of bits. For example, the quadrature and in-phase components of 16-QAM signals are each represented by two bits.

It is known that the log likelihood ratio (Λ) of the bits of a multilevel signal can be determined from the following expressions:

20
$$\Lambda(u_{k,1}) = X_k$$

$$\Lambda(u_{k,i}) = 2^{p-i+1} - |\Lambda(u_{k,i-1})|, i = 2, \dots, p$$

where: $\Lambda(u_{k,1})$ = the log likelihood ratio of the first bit, u_1

$\Lambda(u_{k,i})$ = the log likelihood ratio of the i^{th} bit, u_i

X_k = the X component of the acquired signal

p = the number of bits representing the signal component

- 25 The approximate LLRs for the three bits of the X component of the 64-QAM signal constellation are plotted in FIG. 4. The LLRs of the quadrature (Y) component of the acquired signal could be determined in a similar manner.

If the value of the acquired signal is between ± 1 , the value of the LLR (Λ_1) 120 associated with the signal bit, u_1 , is the smallest of the three

LLRs 120, 122, and 124. In other words, the reliability of the prediction for the value of the first bit, u_1 , is less than the reliability of the predictions of the values of the remaining bits, u_2 and u_3 . Therefore, if a soft decision value is to be assigned to one "least reliable" bit of the three bits of the demodulated signal, the

5 appropriate bit is the most significant bit, u_1 . For a signal in the range of ± 1 , the second least reliable bit signal is the least significant bit, u_3 , because the corresponding LLR (Λ_3) 122 is less than the LLR (Λ_2) 124 for the second bit throughout this range of the X component. If a soft decision value is desired for two bits of the acquired signal, the first and third bits of the three bit 64-QAM

10 signal are the two bits exhibiting the least reliability.

The inventors further discovered that if the LLRs of an acquired signal are limited to a range of values corresponding to a predetermined number of bits for which soft decision values are desired, hard values will result for all bits having an LLR that equals or exceeds that range. As illustrated in FIG. 4, for an acquired

15 signal between "+1" and "-1," only Λ_1 , associated with the most significant bit (u_1), does not exceed a threshold range of ± 1 (illustrated by a bracket) 126. Therefore, if soft information is sought concerning a single bit of the 8-PAM signal, a threshold LLR of ± 1 would identify u_1 as the appropriate bit. Likewise, limiting the LLRs to the range ± 2 (illustrated by a bracket) 128 results in a hard decision for

20 the second bit of the acquired signal. Bits one and three having LLRs 120 and 122 within the threshold range are identified for soft decision values. Likewise, for acquired signals within other specified ranges, limiting the LLRs will identify appropriate bits for soft and hard decision values. In general, for

25 multilevel signals of any order (2^{2p} -QAM or 2^{2p} -PAM) limiting the LLRs to a range ($\pm 1, \pm 2, \dots, \pm 2^{p-1}$) identifies a corresponding number of the least reliable bits of the demodulated signal. Soft decisions can be applied to these bits and hard decisions applied to the remaining "more reliable" bits. Using the second hybrid method, an optimum mix of bits produced by soft and hard decisions can be obtained by limiting the LLR value to a threshold determined by simulation of the

communication system.

All the references cited herein are incorporated by reference.

The terms and expressions that have been employed in the foregoing specification are used as terms of description and not of limitation, and there is no
5 intention, in the use of such terms and expressions, of excluding equivalents of the features shown and described or portions thereof, it being recognized that the scope of the invention is defined and limited only by the claims that follow.

CLAIMS

1. A method of demodulating a multilevel signal comprising the steps of:
- (a) assigning a value to a bit representing said demodulated signal;
 - (a) identifying at least one signal constellation vector proximate to
5 said multilevel signal; and
 - (b) determining a reliability measure for said bit of said demodulated
signal if said bit occupies a bit position corresponding to a bit
position of said at least one proximate constellation vector
occupied by a bit of varying value.
- 10
2. The method of claim 1 wherein the step of identifying at least one signal
constellation vector proximate to said multilevel signal comprises the steps of:
- (a) determining a first and a second phase component of said
multilevel signal;
 - 15 (b) identifying a constellation vector having a first and a second
phase component of maximized absolute value but not
exceeding an absolute value of said first and said second phase
components of said multilevel signal;
 - (c) identifying any constellation vector having one phase component
20 of maximized absolute value but not exceeding said absolute
value of said corresponding phase component of said multilevel
signal and another phase component of minimized absolute
value but not less than said corresponding phase component of
said multilevel signal; and
 - 25 (d) identifying any constellation vector having said first and said
second phase components of minimized absolute value but not
less than said corresponding phase component of said multilevel
signal.
- 30

3. The method of claim 2 further comprising the step of identifying a center of gravity equal distant from said proximate constellation vectors and having first and second center of gravity phase coordinates.

5 4. The method of claim 3 wherein said reliability measure is a function of a difference between at least one of said first and said second phase components of said multilevel signal and said center of gravity phase coordinates.

10 5. A method of demodulating a multilevel signal comprising the steps of:
(a) identifying a neighborhood of a signal constellation in proximity to said signal, said neighborhood defined by a set of at least one constellation signal;
(b) assigning a hard decision value to a bit of said demodulated
15 signal if said demodulated signal bit occupies a bit position corresponding to a position of a bit having a constant value for all constellation signals of said set defining said neighborhood;
(c) determining a center of gravity of said neighborhood; and
(d) assigning a value and a reliability measure to a demodulated
20 signal bit if said demodulated signal bit occupies a bit position corresponding to a position of a bit having a variable value for constellation signals of said set defining said neighborhood.

25 6. The method of claim 5 wherein said reliability measure is a function of a relative position of said multilevel signal and said center of gravity of said neighborhood.

7. The method of claim 5 wherein said reliability measure is a distance between said multilevel signal and said center of gravity of said neighborhood.

30

8. The method of claim 5 wherein said reliability measure comprises a difference between a quadrature component of said multilevel signal and a quadrature component of said neighborhood center of gravity.
- 5 9. The method of claim 5 wherein said reliability measure comprises a difference between an in-phase component of said multilevel signal and an in-phase component of said neighborhood center of gravity.
10. A method of demodulating a signal comprising:
- 10 (a) acquiring a multi-level modulated signal;
- (b) locating said acquired signal relative to a constellation of signal vectors; said signal vectors represented by a plurality of bits;
- (c) identifying a plurality of said signal vectors defining a neighborhood of said constellation nearest said acquired signal;
- 15 (d) determining a center of gravity of said neighborhood;
- (e) assigning a value to a bit representing said acquired signal if a corresponding bit is constant for said plurality of neighborhood defining vectors; and
- 20 (f) assigning a value and a measure of reliability of said value to a bit of said acquired signal if a corresponding bit varies for said plurality of neighborhood defining vectors.
11. The method of claim 10 further comprising assigning a value to a bit representing said acquired signal if said neighborhood is defined by a single
- 25 signal vector.
12. The method of claim 10 wherein said reliability measure is a function of a relative position of said acquired signal and said center of gravity of said neighborhood.

30

13. The method of claim 10 wherein said reliability measure is a distance between said acquired signal and said center of gravity of said neighborhood.
14. The method of claim 10 wherein said reliability measure comprises a difference between a quadrature component of said acquired signal and a quadrature component of said neighborhood center of gravity.
15. The method of claim 10 wherein said reliability measure comprises a difference between an in-phase component of said acquired signal and an in-phase component of said neighborhood center of gravity.
16. The method of claim 10 wherein said constellation of signal vectors is ordered according to a Gray code.
17. A method of demodulating a multi-level signal comprising:
- (a) comparing a reliability of at least two bits of said demodulated multilevel signal;
 - (b) assigning a hard decision value to a bit associated with a greater reliability; and
 - (c) assigning a soft decision value to a bit associated with a lesser reliability.
18. The method of claim 17 wherein said reliability is measured by a log likelihood ratio.
19. The method of claim 17 wherein the step of assigning a soft decision value to said bits associated with a lesser reliability comprises the steps of:
- (a) assigning a value to said bit; and
 - (b) assigning a measure of reliability to said bit.

20. The method of claim 19 wherein said measure of reliability is a log likelihood ratio

21. The method of claim 17 further comprising the steps of:

- 5 (a) limiting said measure of reliability to a predetermined range; and
 (b) providing a soft decision value to bits of said demodulated multilevel signal associated a measure of reliability having values not exceeding a limiting value of said range.

10 22. The method of claim 21 wherein said limiting value of said range equals a function of a number of bits demodulated with a soft decision.

23. A method of demodulating a multi-level signal comprising:

- 15 (a) limiting a measure of reliability to a predetermined range; and
 (b) providing a soft decision value to bits of said demodulated multilevel signal associated a measure of reliability having values not exceeding a limiting value of said range.

20 24. The method of claim 23 wherein said measure of reliability is a log likelihood ratio

25. The method of claim 23 wherein said limiting value of said range equals a number of bits demodulated with a soft decision.

ABSTRACT OF THE DISCLOSURE

The performance of forward error correction decoders for digital communication systems can be improved if soft information relating the reliability of the value representing the demodulated signal is provided to the decoder with a value for the signal. On the other hand, soft information increases the quantity of information that must be processed, increasing the cost and complexity of the decoder.

10 A first hybrid demodulation method produces a demodulated signal having bit values produced by both hard and soft decisions. Whether a bit is produced by a hard or a soft decision is determined by the relative position of the acquired signal and the vectors of the signal constellation for the multilevel modulated signal. Soft information for a bit relates the distance between a component of the
15 acquired signal and a center of gravity of a signal constellation neighborhood defined by a set of signal vectors proximate to the acquired signal.

 A second hybrid demodulation method produces a demodulated signal having a predetermined mixture of bits produced by hard and soft decisions. Log likelihood ratios (LLRs) measuring the reliability of the estimate of the value of
20 each bit are compared so that soft decisions are applied to the least reliable bits. Limiting the LLRs results in a predetermined number of bits produced by soft decisions with the remainder produced by hard decisions.

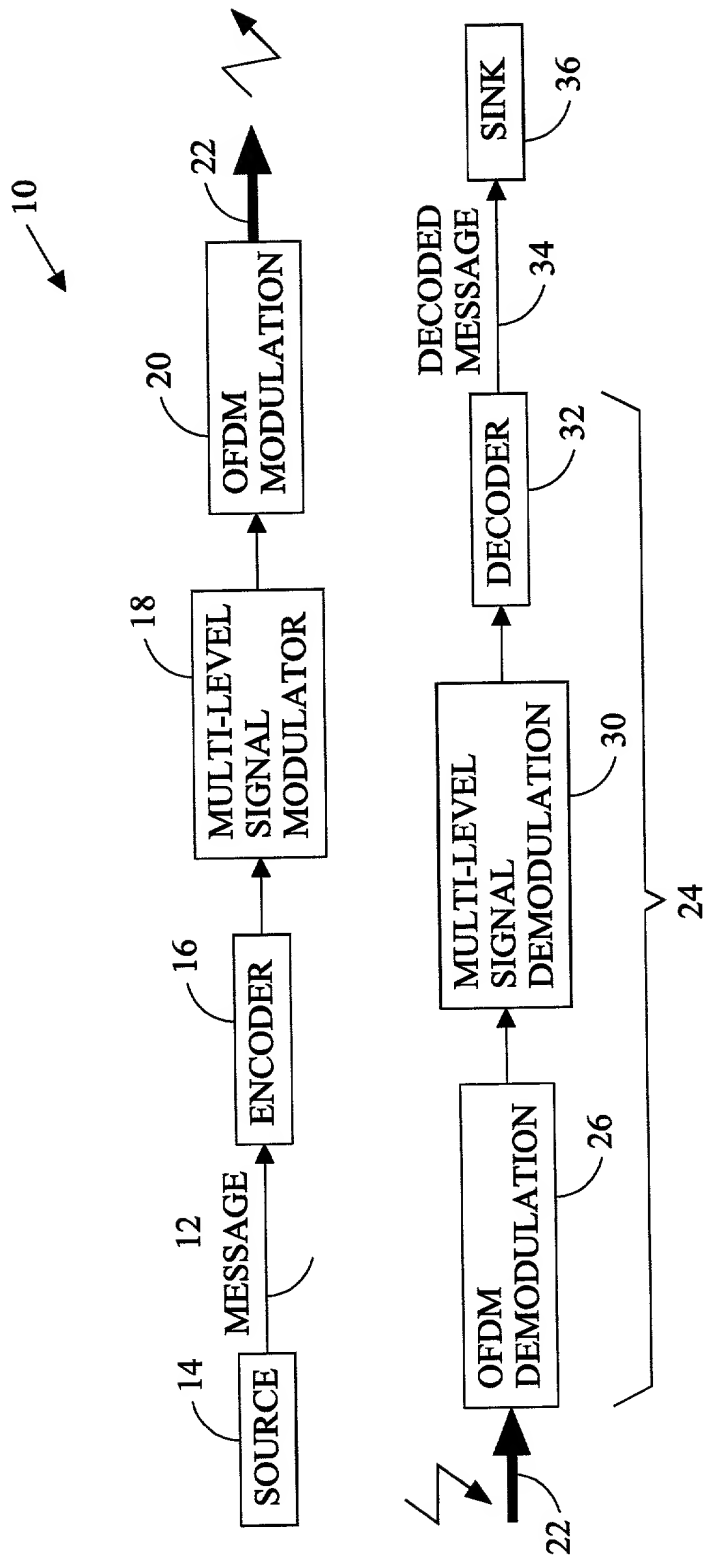


FIG. 1

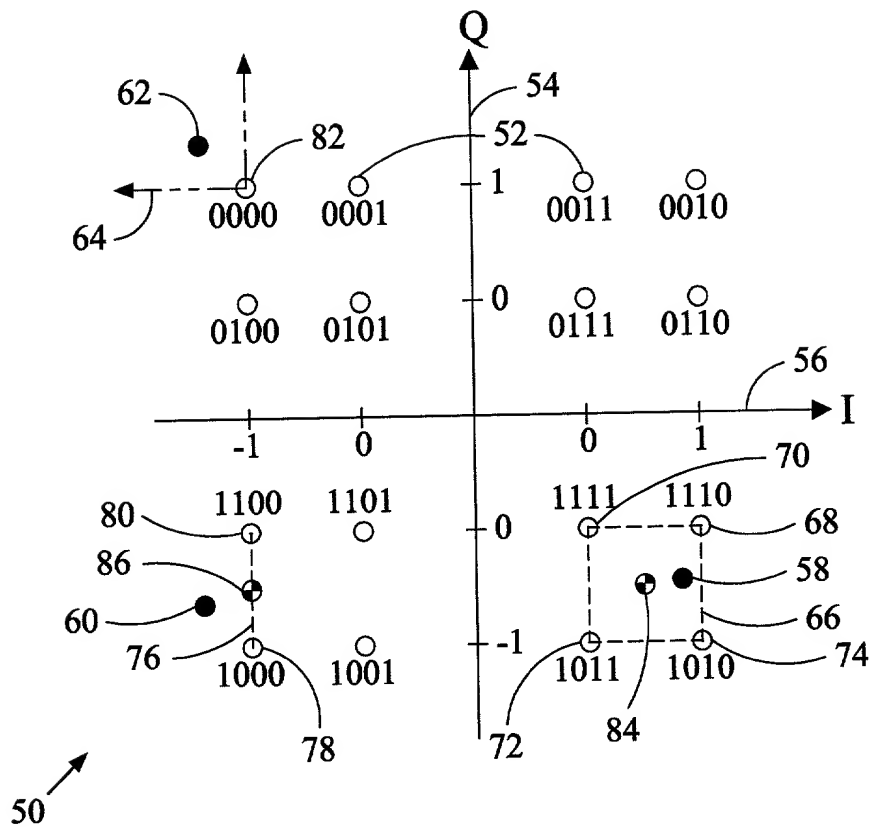


FIG. 2

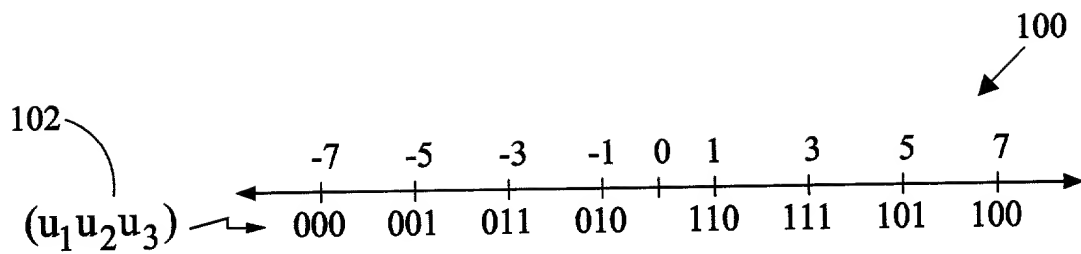


FIG. 3

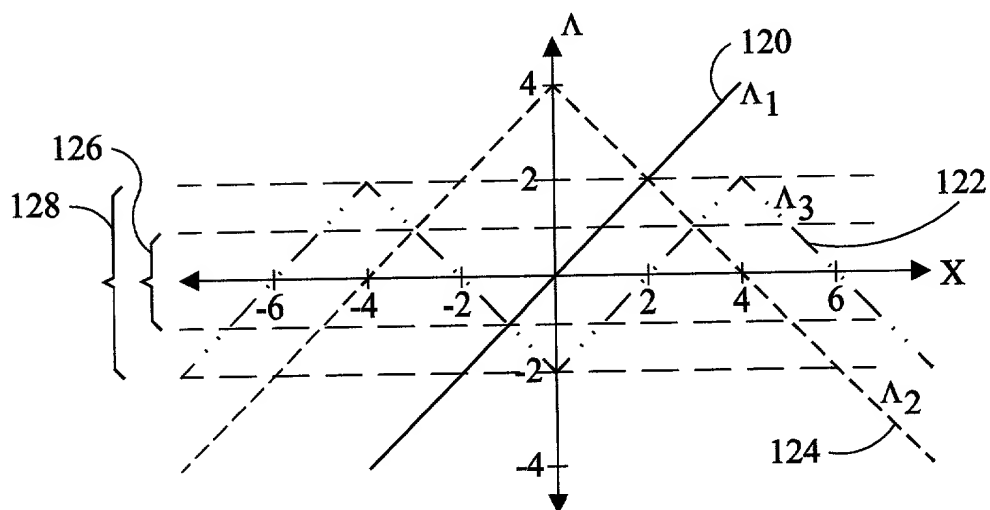


FIG. 4

DECLARATION

As the below named inventors, we hereby declare that:

Our residences, post office addresses and citizenship are as stated below next to our names respectively.

We believe that we are the original, first and only inventors of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD OF HYBRID SOFT/HARD DECISION DEMODULATION OF SIGNALS WITH MULTILEVEL MODULATION

the specification of which:

- ☒ is attached hereto.
was filed on _____ as
☐ Application Serial No. _____
and was amended on _____. (if applicable)

We hereby state that we have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above.

We acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

We hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventors certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			<u>Priority Claimed</u>
			<input type="checkbox"/> Yes <input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	

We hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below.

_____ (Application Serial No.)	_____ (Filing Date)
-----------------------------------	------------------------

We hereby claim the benefit under Title 35, United States Code, § 120, of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, we acknowledge the

duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Ser. No.) (Filing Date) (Status) (patented, pending, abandoned)

We hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Dated: 7/6/00

Residence
Citizenship
Post Office Address

K. Srinivas
Srinivas Kandala
Clark County, Washington
India
8701 N E 54th Street, C-1
Vancouver, Washington 98662

Dated: 7/6/00

Residence
Citizenship
Post Office Address

V. S. Somayazulu
V. Srinivasa Somayazulu
Washington County, Oregon
USA
12910 Winterlake Drive
Tigard, Oregon 97223

Dated: _____

Residence
Citizenship
Post Office Address

Chan K. Park
Clark County, Washington
South Korea
13705 S E 18th Street, #1
Vancouver, Washington 98683

DECLARATION

As the below named inventors, we hereby declare that:

Our residences, post office addresses and citizenship are as stated below next to our names respectively.

We believe that we are the original, first and only inventors of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD OF HYBRID SOFT/HARD DECISION DEMODULATION OF SIGNALS WITH MULTILEVEL MODULATION

the specification of which:

- ☒ is attached hereto.
was filed on _____ as
☐ Application Serial No. _____
and was amended on _____. (if applicable)

We hereby state that we have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above.

We acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

We hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventors certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

☐ Yes ☐ No

(Number)

(Country)

(Day/Month/Year Filed)

We hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below.

(Application Serial No.)

(Filing Date)

We hereby claim the benefit under Title 35, United States Code, § 120, of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, we acknowledge the

duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Ser. No.)

(Filing Date)

(Status) (patented, pending, abandoned)

We hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Dated: _____

Residence
Citizenship
Post Office Address

Srinivas Kandala
Clark County, Washington
India
8701 N E 54th Street, C-1
Vancouver, Washington 98662


Dated: _____

Residence
Citizenship
Post Office Address

V. Srinivasa Somayazulu
Washington County, Oregon
USA
12910 Winterlake Drive
Tigard, Oregon 97223

Dated: July 9, 2000

Residence
Citizenship
Post Office Address



Chan K. Park
Washington County, Oregon
South Korea
19575 NW Decora Lane, #426
Hillsboro, Oregon 97124

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
PATENT APPLICATION EXAMINING OPERATIONS**

Applicant : Srinvasa Somayazulu et al.

Group Art Unit:

Serial No :

Examiner:

Filed: Filed concurrently herewith

Title: **METHOD OF HYBRID SOFT/HARD DECISION
DEMODULATION OF SIGNALS WITH MULTILEVEL MODULATION**


POWER OF ATTORNEY

I, Jon K. Clemens, declare that I am the President of Sharp Laboratories of America, Inc., a Washington corporation, and am authorized to execute this document on its behalf. Sharp Laboratories of America, Inc., as the assignee of the entire right, title and interest in the above-referenced patent application and hereby appoints Jacob E. Vilhauer, Jr., Reg. No. 24,885, Charles D. McClung, Reg. No. 26,568, Dennis E. Stenzel, Reg. No. 28,763, Donald B. Haslett, Reg. No. 28,855, William O. Geny, Reg. No. 27,444, J. Peter Staples, Reg. No. 30,690, Kevin L. Russell, Reg. No. 38,292, Nancy J. Moriarty, Reg. No. 40,733, Bruce W. DeKock, Reg. No. 40,585, and Tim A. Long, Reg. No. 28,876 of the firm of CHERNOFF, VILHAUER, McCLUNG & STENZEL, 1600 ODS Tower, 601 S W Second Avenue, Portland, Oregon 97204, Telephone No. (503) 227-5631, its attorneys, jointly and individually, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Sharp Laboratories of America, Inc.

Dated: July 7, 2000


Name: Jon K. Clemens
Title: President

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

CERTIFICATE UNDER 37 CFR §3.73(b)

Applicants: Srinivas Kandala, V. Srinivasa Somayazulu and Chan K. Park

Application No: N/A Filed: Concurrently herewith

Title: **METHOD OF HYBRID SOFT/HARD DECISION DEMODULATION OF SIGNALS WITH MULTILEVEL MODULATION**

Sharp Laboratories of America, Inc. (Assignee) a Washington corporation (Type of Assignee, e.g., corporation, partnership, university, government agency, etc.) certifies that it is the assignee of the entire right, title and interest in the patent application identified above by virtue of either:

A. ☐ An assignment from the inventor(s) of the patent application identified above. The assignment was recorded in the Patent and Trademark Office at Reel , Frame , or for which a copy thereof is attached.

B. ☐ A chain of title from the inventor(s), of the patent application identified above, to the current assignee as shown below:

1. From: To:

The document was recorded in the Patent and Trademark Office at Reel , Frame , or for which a copy is attached.

2. From: To:

The document was recorded in the Patent and Trademark Office at Reel , Frame , or for which a copy is attached.

☐ Additional documents in the chain of title are listed on a supplemental sheet.

☒ Copies of assignments or other documents in the chain of title are attached. (Where one or more of the documents is unrecorded.)

The undersigned has reviewed all the documents in the chain of title of the patent application identified above and, to the best of undersigned's knowledge and belief, title is in the assignee identified above.


The undersigned (whose title is supplied below) is empowered to sign this Certificate on behalf of the assignee.

I hereby declare that all statements made herein of my own knowledge are true, and that all statements made on information and belief are believed to be true; and further, that these statements are made with the knowledge that willful false statements, and the like so made, are punishable by fine or imprisonment, or both, under Section 1001, Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of **METHOD OF HYBRID SOFT/HARD DECISION DEMODULATION OF SIGNALS WITH MULTILEVEL MODULATION** or any patent issuing thereon.

Date: July 12, 2000

Name: Timothy A. Long

Title: Attorney for the Assignee (a copy of the Power of Attorney is attached)

Signature: 

Chernoff, Vilhauer, McClung & Stenzel, LLP
1600 ODS Tower
601 S W Second Avenue
Portland, Oregon 97204
Tel: (503) 227-5631